LOAD CAPACITY: UP TO 400 KG

WM LIGHT

DETACHABLE LOAD-ING RAMP. THIS IS THE MOST VERSATILE MOD-EL IN THE WM RANGE, ESPECIALLY SUITABLE FOR LIGHT LOADS OF UP TO 400 KG.







Anti-slip anodised aluminium platform



Flexible contact plate to the van floor



Two wheels for easy deployment



Quick release and coupling











DEPLOYMENT: The WM Light is extremely lightweight, using both spring and gas strut assistance. An external swivel kit is supplied on request, making it possible to gain access to the van like a second door.

DETACHABLE AND VERSATILE: Quick release handles allow for easy removal of the ramp, leaving the load area unobstructed. The keyhole locating plates allow for easy and quick transfer between vehicles.




EXTERNAL SWIVELLING

Swivel kit that makes it possible to rotate the ramp through 90° toward the exterior of the van. Allows access to the van's cargo area without using the ramp.



GANGWAY CONFIGURATION





OPTIONAL EXTRAS

nal swivelling optional weighs +6 kg PLATFORM VERSIONS

FIXED INSTALLATION

The ramp is available with a platform surface in perforated aluminium with alternated convex holes, WM LIGHT-F model. This improves the platform's anti-slip properties while retaining the 400 kg load capacity. An aluminium extended mesh version, known as WM LIGHT-R, is available as an alternative. Max. load capacity: 300 kg.

A fixed base can be mounted to the ramp on request. This means the

ramp becomes fixed and can no

longer be removed from the van.

This solution simplifies and streamlines installation operations. The

specified weight does not include

the installation kit, 5 kg. The exter-

APPLICATION SECTORS





CLEANING CA

CATERING MOTO BIC

D

MOTORBIKES BICYCLES






ELECTRICIANS MEDICAL PLUMBING AMBULANCES AND HEATING

ENGINEERS

EVENTS CONCERTS

EXAMPLE MODELS	A (mm)	L (mm)	L2 (mm)	H (mm)	P (mm)	P1 (mm)	P2 (mm)	Capac. (Kg)	Weight* (Kg)
LIGHT 60	2000	900	600	1090	203	345	60	400	46
LIGHT 65	2250	950	650	1215	203	345	60	400	51
LIGHT 70	2000	100	700	1090	203	345	60	400	49
LIGHT 75	2500	1050	750	1340	203	345	60	400	58
LIGHT 80	2750	1100	800	1465	203	345	60	400	64
LIGHT 80	3000	1100	800	1590	203	345	60	400	68
LIGHT 80	3250	1100	800	1715	203	345	60	400	72
LIGHT 85	2500	1150	850	1340	203	345	60	400	62
LIGHT 85	3250	1150	850	1715	203	345	60	400	75
LIGHT 90	3000	1200	900	1590	203	345	60	400	73
LIGHT 95	2750	1250	950	1465	203	345	60	400	71
LIGHT 100	2500	1300	1000	1340	203	345	60	400	68
LIGHT 100	2750	1300	1000	1465	203	345	60	400	73
LIGHT 100	3000	1300	1000	1590	203	345	60	400	78
LIGHT 105	3250	1350	1050	1715	203	345	60	400	85

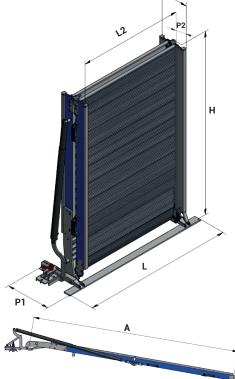

* The specified weight does not include the installation kit, 5 kg. The external swivelling optional weighs +6 kg